



Rolling III

OWNERS MANUAL

Safety Information

WARNING: No helmet can protect the wearer against all foreseeable high speed and low speed impacts. However, for maximum head protection, the helmet must be of proper fit and the retention system must be securely fastened under the chin. Failure to have a proper fit and to securely the helmet is dangerous as the helmet could come off in an accident resulting in severe head injury or death.


Before purchasing a helmet, Please follow Step A all the way through Step D below carefully

A. To determine proper fit

1. Measure your head size. Pass a tape measure horizontally around your head at a height of about one inch (2.5cm) above your eyebrows that results in the largest measurement.
2. Select the helmet that is closest to your head size with the above measurement. As the helmet may not always exactly meet your head size and if your head measurement falls between two helmet size, first try on the smaller size.

B. Try the helmet on

Expand the helmet opening with your hands, and slide your head into the helmet. Pull the chinstraps only, not the chinstrap covers. Pulling on the covers may rip them. If the helmet is not tight, it is too big for you. If you are unfamiliar with helmets you may be reluctant to pull down the helmet, which should feel tight. Even if you feel it is difficult to put it on, please use the smallest helmet possible. You should feel a snug fit.

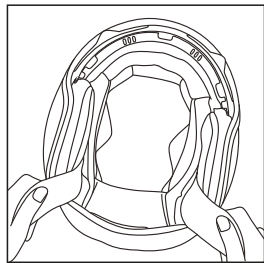

C. Check for a proper fit. With the helmet on, Go through the following Checklist to


determine whether the helmet is the correct size



1. Check whether the helmet inner lining fits snugly all around your head
2. Check whether the top pad presses closely on the top of your head
3. Check whether the cheek pads are in contact with your cheeks.
4. Check to make sure there is no space around your brow under the inner lining, where you can insert your fingers.
5. Now, take hold of the helmet with a hand on each side.

Without moving your head, try to move the helmet up and down, and side to side. You should feel the skin of your head and face being pulled as you try to move the helmet. If you can move the helmet around easily, it is too big. Try a smaller size.


D. Check the retention system and go through the following steps

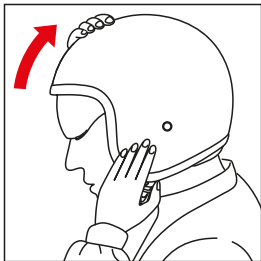


1. Fasten the chinstrap as tight as possible without causing you pain. There must be no slack in the strap and it must be tight up against your throat.
2. With the chinstrap secured, put your hands flat on the back of the helmet and try to push the helmet off by rotating it forward.
3. Next, put your hands on the front of the helmet above your forehead (or on the chin guard) and try to push the helmet off by rotating it toward the rear.

4. If the helmet starts to come off in either direction, do not use the helmet. Either the helmet is too large for you or the chinstrap is not tightened enough.

Helmet wearing method




Wrong



Right


Repeat all of the above steps until you have a proper fit and the helmet is securely fastened

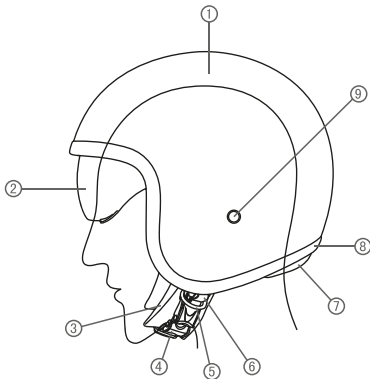

1. Shell
2. Shield
3. Strap padding
4. Buckle
5. D-ring
6. Chinstrap
7. Neck Pad
8. Rubber Edge Trim
9. Rivet


How to use the Chin Strap

Through the Quick-release Retention System, according to the user's head size adjusted strap, to adjust the tightness of the objective, lets the user feel more comfortable.

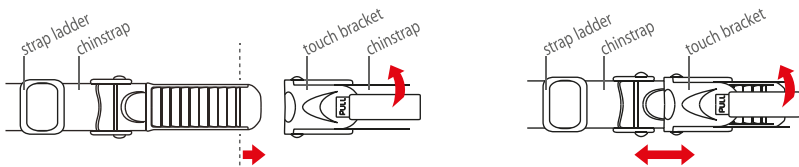


Quick-release retention system


How to Fix Shield

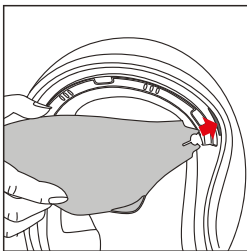

1. The Fix Shield aligns clamping mouth

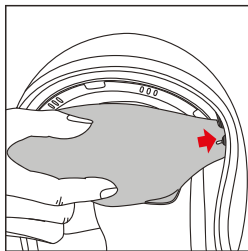


2. The Fix Shield is inserted into the clamping mouth

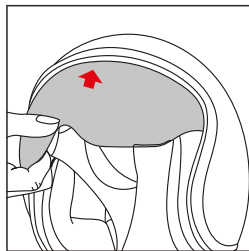


3. The Fix Shield into the clamping groove

Detachable Inner Parts



Crown Pad

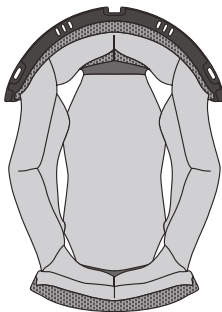


Cheek Pad R




Cheek Pad L

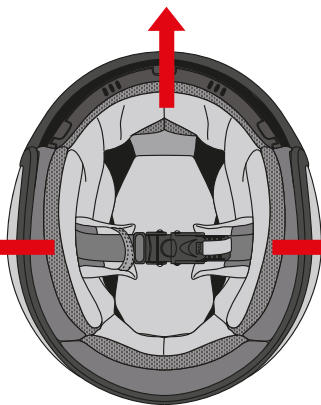


How to install Pad

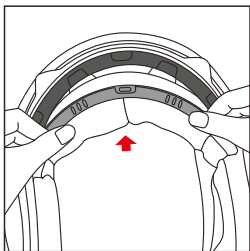

1. The mesh padding into the helmet

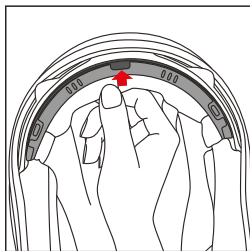


2. Front buckle center alignment, buckle




3. Will both sides buckle alignment, buckle


How to install cheek pad



1. Alignment of male and female buckle, wherein a first.



2. Alignment of male and female button, then on another pair



3. The magic buckle male and female mating



NZI TECHNICAL PROTECTION, S.L. - Yecla - Murcia - Spain -

Ph.: +34 968 751 356 - Fax: +34 968 794 500 - info@nzi.es



www.nzi.es



www.3dhelmetsnzi.com



[nzihelmets](https://www.facebook.com/nzihelmets)



[@NZIHelmets](https://twitter.com/NZIHelmets)